TI-440 Wifi Setup

Step 1
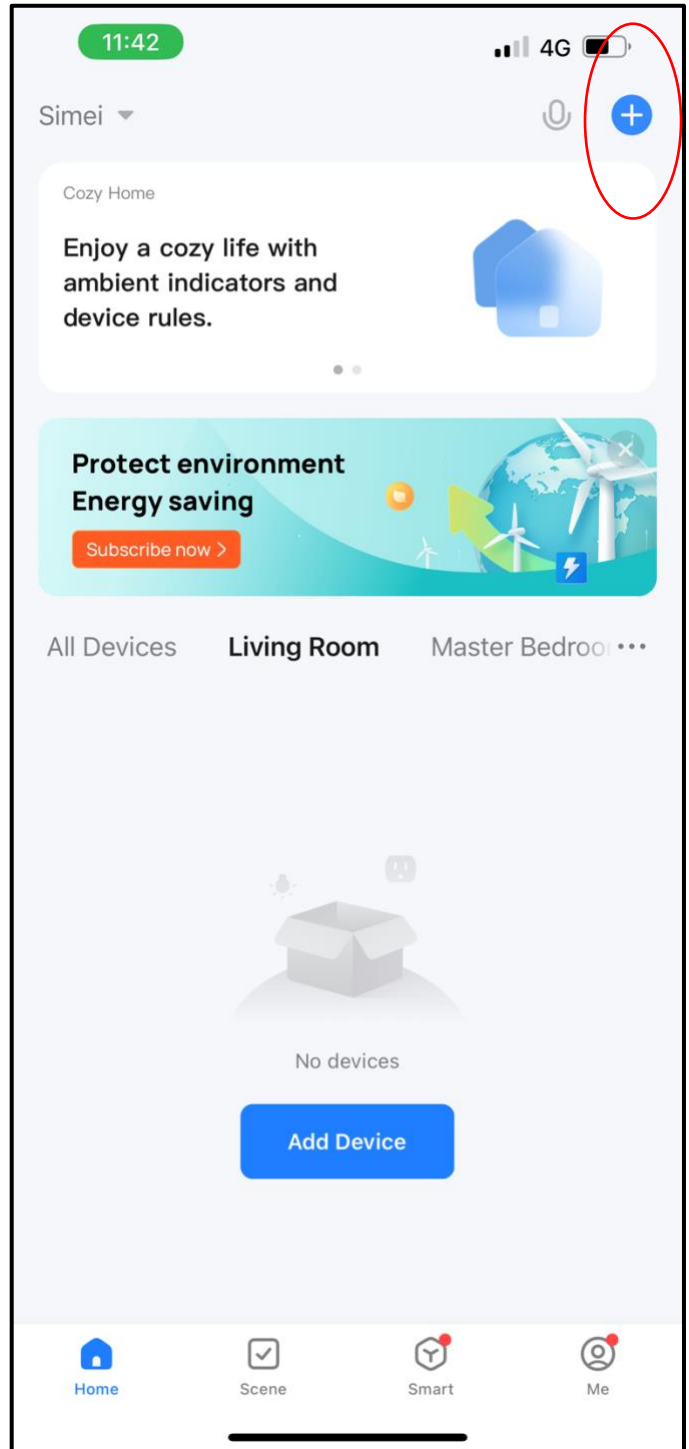

Factory reset button on the bottom of the camera.

Power up camera.

Camera will start rotating and green light start blinking.

Camera is in pairing mode.

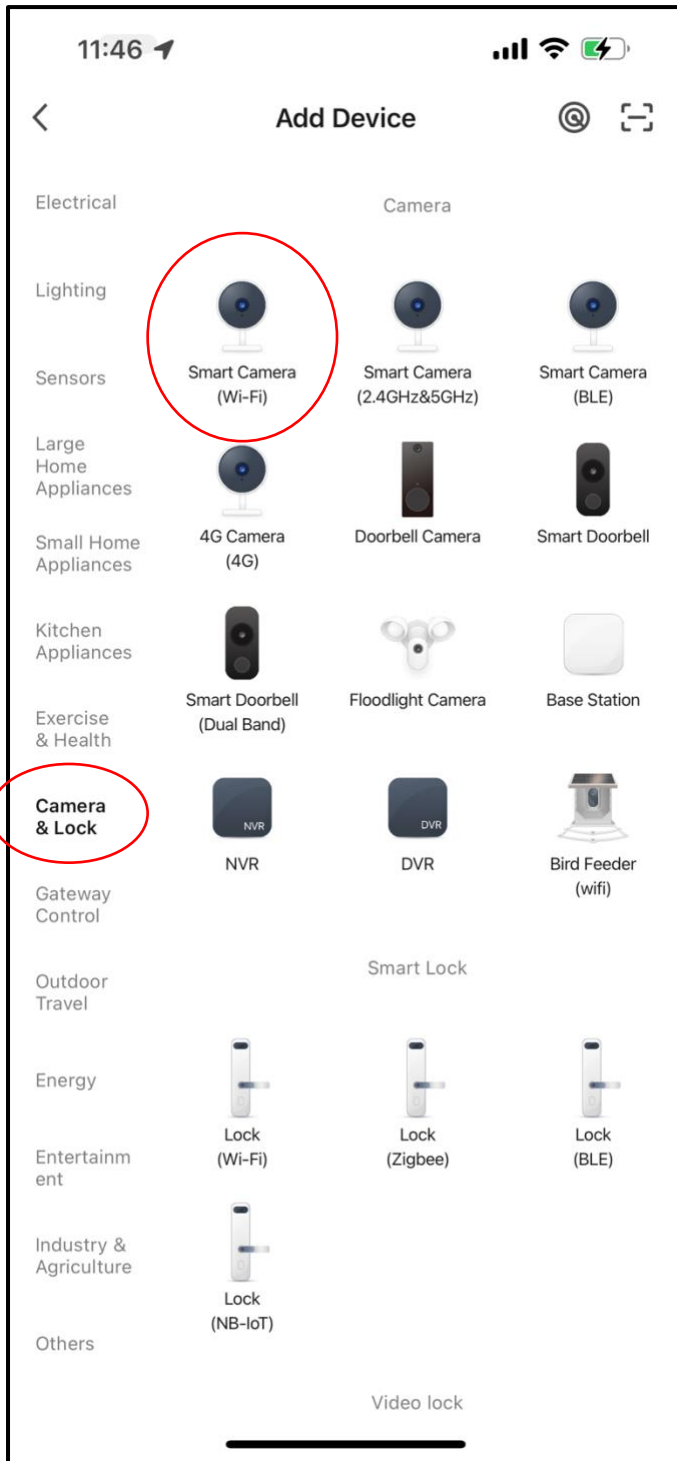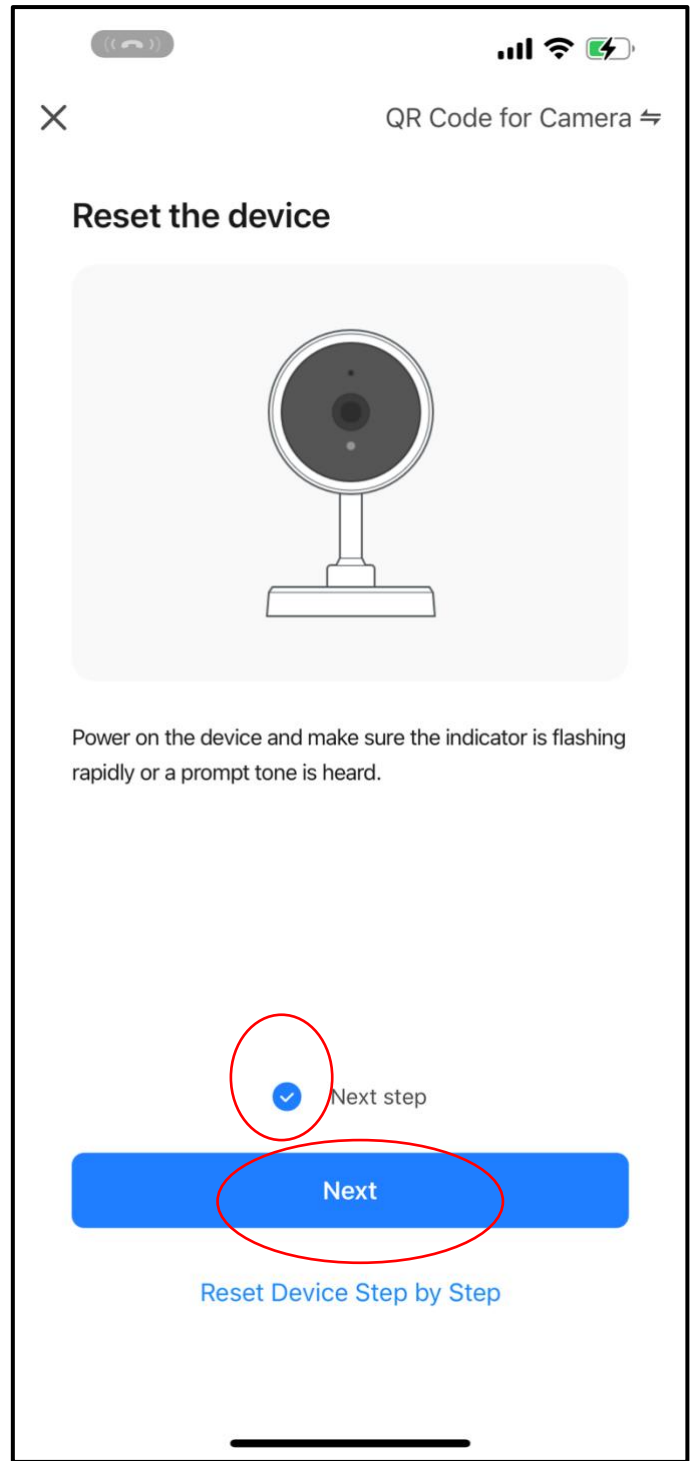Press and hold reset button if camera light is not blinking.

Step 2
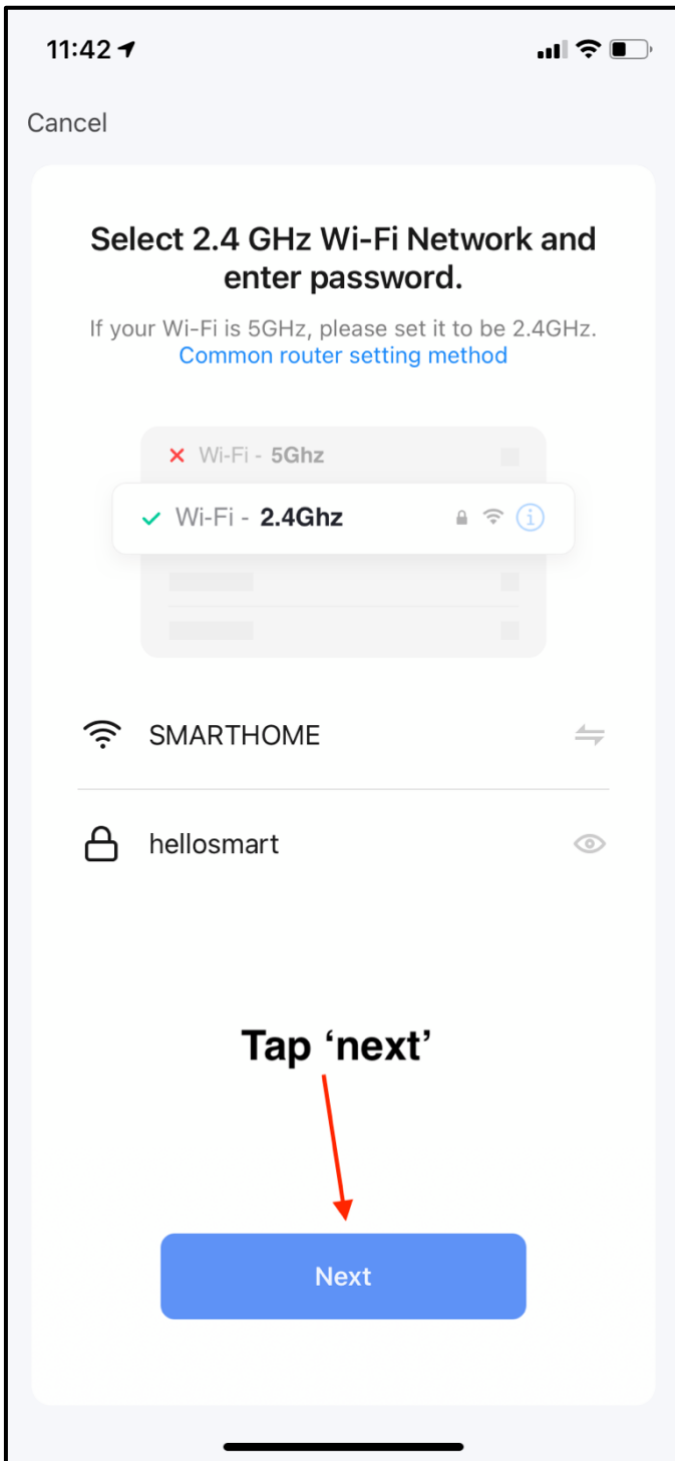

Tap the top right + to add device.

Step 3

Select the correct device.

Step 4

Check the box

Click "Next" to continue

Step 5

11:42

Cancel

Select 2.4 GHz Wi-Fi Network and enter password.

If your Wi-Fi is 5GHz, please set it to be 2.4GHz.
Common router setting method

✗ Wi-Fi - 5Ghz

✓ Wi-Fi - **2.4Ghz**

SMARTHOME

hellosmart

Tap 'next'

Next

Choose 2.4G network and
key in the correct password.

Step 6

11:47

✕

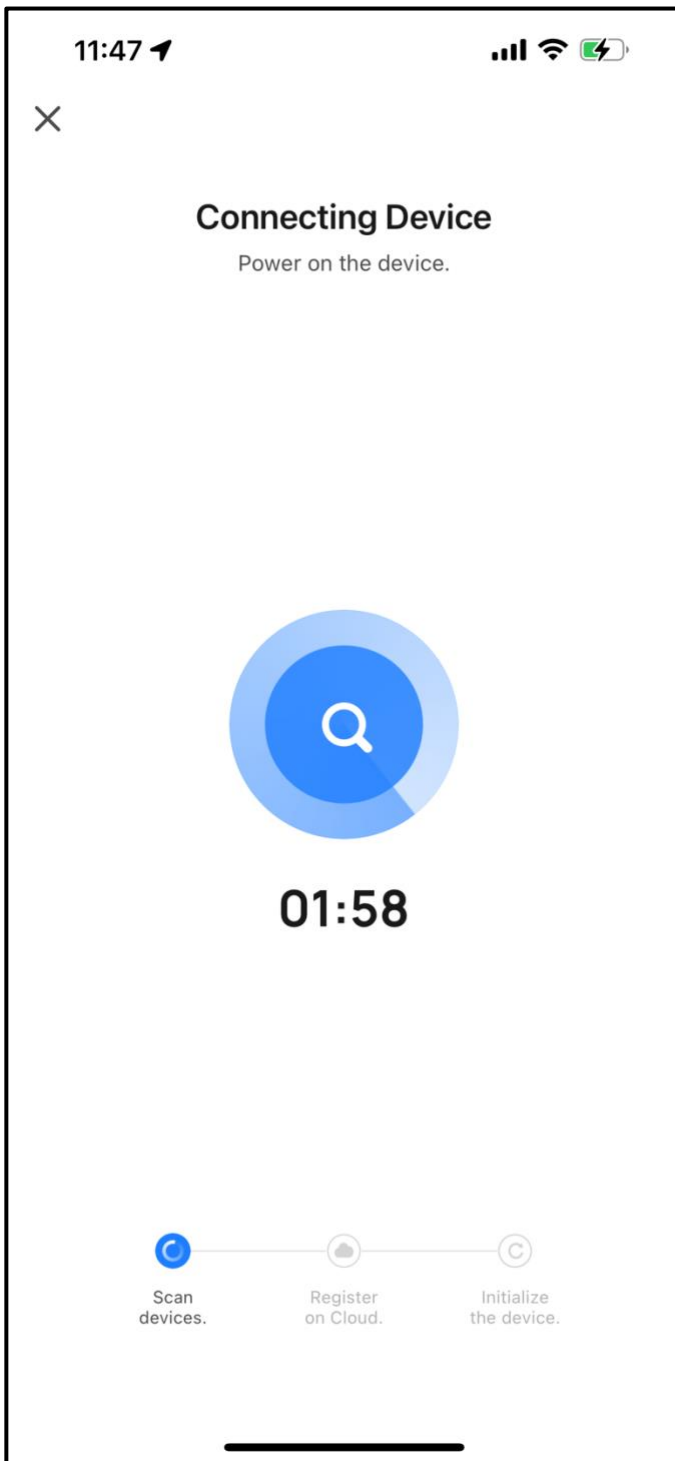Please scan the QR code from 15 to 20 cm away

I Heard a Prompt
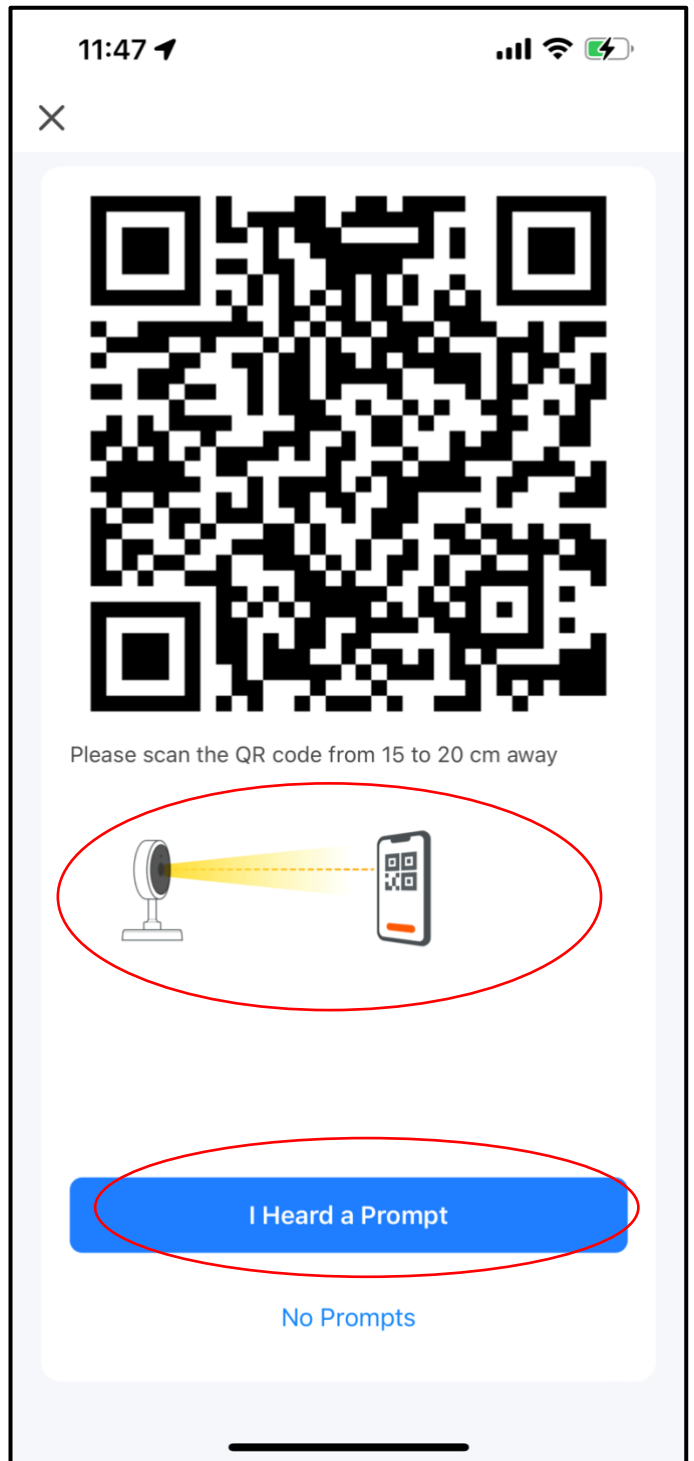
No Prompts

Scan the QR code on the app
to the doorbell lens. Distance
should be 15-20cm away.

After successful detection,
tap "I Heard a Prompt"

Step 7

Connecting Device

Power on the device.

01:58

Scan
devices.

Register
on Cloud.

Initialize
the device.

If pairing is not successful,
repeat Step 1 again.

The camera pairing process
will begin.